

承 认 书
*SPECIFICATION FOR
APPROVAL*

CUSTOMER (客户) : 联合创新

Model Number (型号) : AY090D-1MF01

Part Description (元件描述) : switching power supply

Part No. of Customer (客户编号) : _____

Date of Approval (确认日期) : 2018-5-08

Prepared By: AOYUAN (奥源确认栏)

Reported By	Checked By	Approved By

Please return us one original approved by you with your signatures.

客户承认盖章后敬请寄回正本一份

Customer Signature: (客户签名栏)

Reported By	Checked By	Approved By



东莞市奥源电子科技有限公司
DONGGUAN AOYUAN ELECTRONICS TECHNOLOGY CO.,LTD

☐系统文件 ☒第一类支持文件 ☐第二类支持文件 ☐生效日期:发行一日后生效

主旨 Subject: AY 工程规范	型号:AY090D-1MF01 客户(代码):LH002	文件版本:1.1 Revision 页别数:1 OF 11 Page
---------------------------	---------------------------------	---

版本展演 Revision History							
序 号 NO.	修 改 内 容 Modify Item				变更日期 Change date	版本 Revision	
1	首次发行				2018-05-08	V1.0	
2	调整 ADJ 电压范围				2018-05-18	V1.1	
3	更新输出过流保护点范围 3.6-8A				2023-08-02	V1.2	
收文单位	☒ 研发中心 ☐人力资源部 ☐ 财务部 ☒ 制造部 ☒ 品管部 ☐ 采购部 ☒ 工程部 ☐ 销售部 ☐ 计划部 ☐变压器事业部						
拟制 部门	研发中心	拟制		审核		批准	

Table of Content（目录）

1. SCOPE（范围）.....3

2. FEATURE（特性）.....3

3. PHYSICAL CHARACTERISTICS（物理特性）.....3

 3.1 OUTLINE DIMENSIONS(UNIT: MM) (结构图).....3

 3.2 WEIGHT（重量）.....4

 3.3 POWER SUPPLY PIN DEFINITION（电源连接器脚位定义）.....4

 3.4 TIME SEQUENCE(时序).....4

4. ELECTRICAL REQUIREMENTS(电气特性).....5

 4.1 INPUT ELECTRICAL CHARACTERISTICS OVERVIEW（输入特性）.....5

 4.3 CROSS REGULATION（交叉调整率）.....5

 4.4 LED BACKLIGHT CHARACTERISTICS（LED 背光电性参数）.....6

 4.5 SIGNAL CONTROL LEVEL（控制电平）.....6

 4.6 DC OUTPUT RIPPLE & NOISE(输出纹波与噪音).....6

 4.7 DC OUTPUT OVERSHOOT DURING TURN-ON & TURN-OFF（输出超调）.....6

 4.8 DYNAMIC RESPONSE（动态响应）.....7

 4.9 OUTPUT IMPULSE CURRENT（输出冲击电流）.....7

 4.10 PROTECTION(保护).....7

 4.10.2 OVER VOLTAGE(过压测试).....7

 4.11 EFFICIENCY(效率).....8

 4.12 GREEN MODE FUNCTION(环保模式).....8

 4.13 TURN ON DELAY TIME(开机延迟时间).....8

 4.14 HOLD-UP TIME(关机保持时间).....9

 4.15 MEAN TIME BETWEEN FAILURES（MTBF）（平均无故障时间）.....9

 4.16 HI-POT TEST(耐压测试).....9

5. ENVIRONMENTAL REQUIREMENT（工作环境）.....9

 5.1 TEMPERATURE（环境温度）.....9

 5.2 HUMIDITY（环境湿度）.....9

 5.3 ALTITUDE（海拔高度）.....9

6. INTERNATIONAL STANDARDS(国际性认证).....10

 6.1 EMC（电磁兼容性）.....10

 6.2 SAFETY（安全）.....11

7. NOTICE（注意事项）.....11

1. Scope (范围)

The AY090D-1MF01 omprises a 100 Watts single-output LED lips
(AY090D-1MF01 是一款单路输出总输出功率为 100 瓦的 LED 二合一)

2. Feature (特性)

All products including samples delivered will meet all the requirements as outlined in the document. The basic requirements of the design features are listed below:

(所有提供的产品包括样品将满足本文件所描述的产品规格。其设计基本要求如下)

* Output Voltages: +12V 2 String LED Drive.


(输出电压: +12V 2 通道 LED 驱动)

* Short circuit protection / Over current protection/Over voltage protection
(短路保护/过流保护/过压保护)

* High efficiency : The efficiency is greater than 80%
(效率: 大于 80%)

3. Physical characteristics (物理特性)

3.1 Outline dimensions(unit: mm) (结构图)

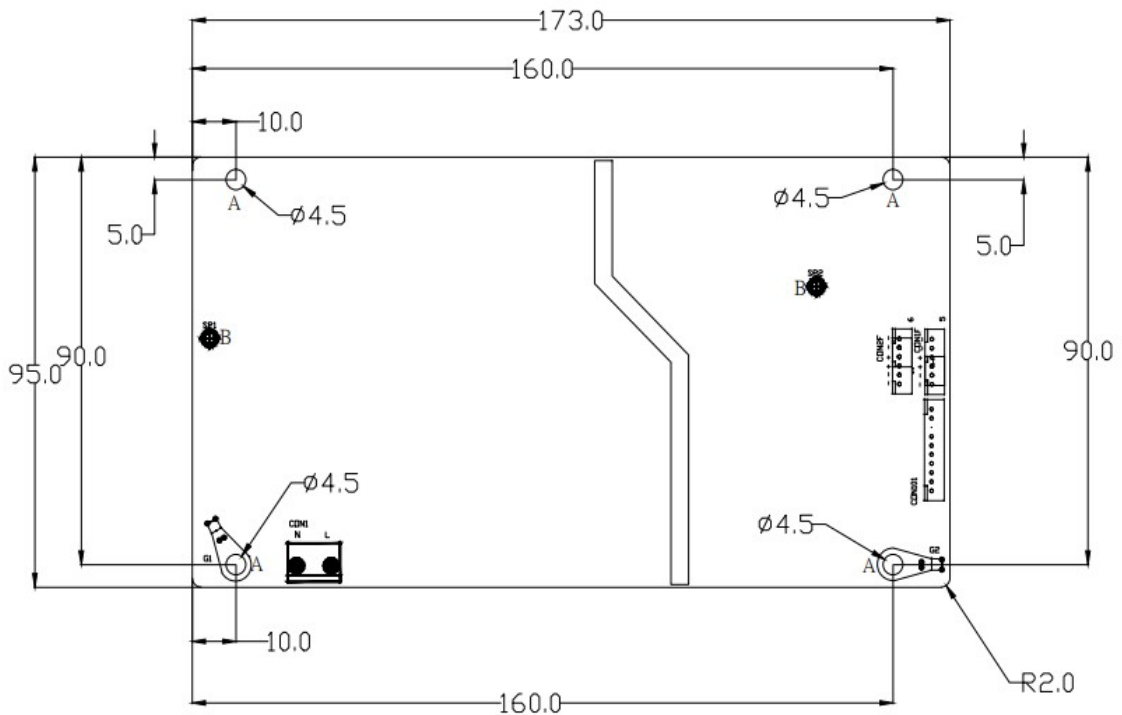

NOTE:

1.A孔为定位孔,B孔为隔离柱孔

2.公差:长度 ± 0.5 ,孔径 ± 0.2

173(L)*95 (W)*26(H) mm. (长L *宽W * 高H)

Note: The sample height not include the components pin and PCB
样品的高度不包括元件引脚和 PCB 板

3.2 Weight (重量)

单板样机重量约 535g

3.3 Power supply pin definition (电源连接器脚位定义)

Table 1 Pin-CON1 Connection and Function (插座 CON1 的引脚定义)

NO.	Pin Connection	Function
1	AC-L	AC INPUT LINE
2	NC	NC
3	AC-N	AC INPUT NEUTRAL

Note: CON1 :180° connection, type: pitch 3.96mm (180° 插座 CON1 间距是 3.96mm)

Table 2 Pin-CON101 Connection and Function (插座 CON200 的引脚定义)

NO.	Pin connection	Function
1, 2, 3	+12V	+12VDC OUTPUT
4, 5, 6	GND	GROUND
7	PS/ON	ON/OFF CONTROL (ON = HIGH)
8	NC	NC
9	BL/ON	ON/OFF CONTROL (ON=HIGH)
10	ADJ	BRIGHTNESS CONTROL

Note: CON200: 180° connection, type: pitch 2.5mm(180° 插座 CON101 的间距是 2.0 毫米)

Table 3 Pin- CON1F, CON2F Connection and Function (插座 CON1F, CON2F 的引脚定义)

NO.	Pin connection	Function
1	LED1 +	LED power supply
2	LED1 -	LED current sense for string

Note: CON1F, CON2F: 180° connection, type: pitch2.0mm (180° 插座 CON1F, CON2F 的间距为 2.0 毫米)

3.4 Time Sequence (时序)

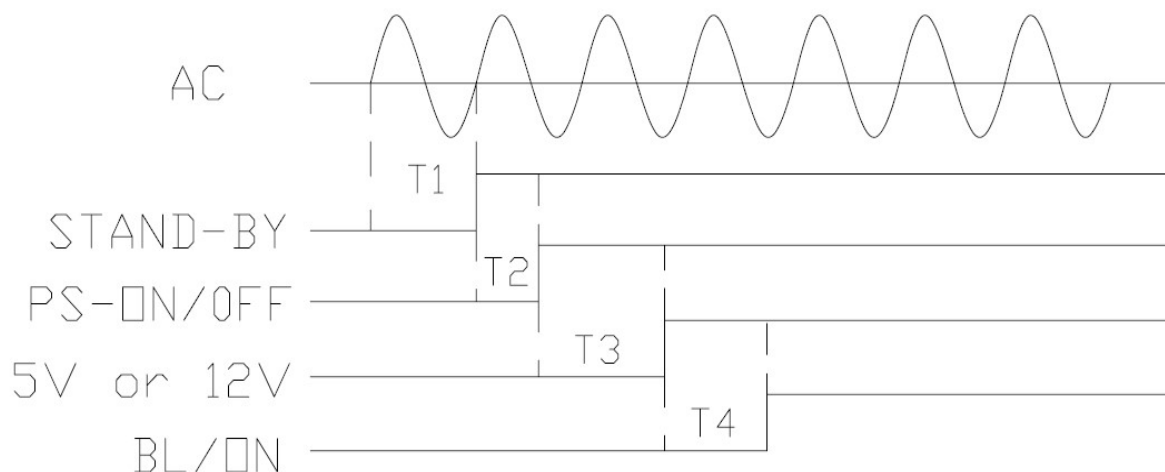


Table 4 Time Sequence (电源时时序)

ITEM	MIN	TYP	MAX	UNITS
T1	-----	1000	3000	ms
T2	10	-----	-----	ms
T3	5	10	-----	ms
T4	10	-----	-----	ms

Note: The timing requirements for the power supply operation must meet table 4.
(电源应用时序必须符合表格 4 内要求)。

4. Electrical requirements(电气特性)

4.1 Input Electrical Characteristics Overview (输入特性)

Table 5 Input Electrical Characteristics(输入特性)

Input voltage range 输入电压	90Vac to 264Vac
Normal voltage range 标称输入	100Vac to 240Vac
Limited working Range 极限工作范围	90Vac to 264Vac
Frequency range 频率范围	50Hz/60Hz $\pm$ 5%
Max input ac current 满载输入电流	2A max at full load and 100Vac condition
Inrush Current 浪涌电流	100A max at full load ,cold and 220Vac condition
Power Factor 功率因数	90% min at rate load and 90V~240Vac condition

4.2 Output Voltages and Loads(输出电压与负载)

Table 6 Output voltage and load. (输出电压与负载)

Output Voltage 输出电压	Regulation 调整率	Min. Load 最小负载	Rate Load 标称负载(A)	Max. Load 最大负载
+12V	+10.8V~+13.2V	0.3A	2.5A	3.0A

Note: * The Max current or power should be test at other of dc output at Rated load,
and the max current pulse width within 100ms

最大电流或功率的测试是在其它各组负载在标称值时测试，且脉宽小于 100 毫秒

4.3 Cross regulation (交叉调整率)

Table 7 Output Voltage, Current & Regulation. (交叉调整率)

Vin 输入电压	Volts limit (电压范围)	Output Load(输出负载)
	12V	12V(A)
90Vac	+10.8- 13.2V	0.3
264Vac	+10.8- 13.2V	2.5

Note: 1. All of the cross load conditions, the regulation must be meet Table 7

所有交叉负载条件内，输出调整率符合 Table 7

2. All of the cross load conditions, the LED must be start-up

所有交叉负载条件内，LED 必须保持正常开启。

4.4 LED Backlight Characteristics (LED 背光电性参数)

Table 8 LED backlight characteristics. (LED 电性参数)

Parameter	Symba	MIN	TYP	MAX	REMARK
ADJ	Vin	0V	--	5V	ON/OFF=5V
Output valtage 1&2	Vout	39.2V	43.4V	47.6V	ON/OFF=5V, ADJ=0V
Output current 1&2	Iout	580mA	610mA	640mA	ON/OFF=5V, ADJ=0V
Output current 1&2	Iout	40mA	100mA	150mA	ON/OFF=5V, ADJ=4V

4.5 Signal Control Level (控制电平)

Table 9 PS-on/off, BL-on/off and ADJ. (电源、背光、调光电平)

signal	PS-ON/OFF	BL-ON/OFF	Level	PWM voltage	RMARK
on	2.5~5.0Vdc	2.5~5.0 Vdc	high	2.5~5.0 Vdc	PS-ON/OFF and BL-ON/OFF is on, output=12V and LED1. LED2
off	0~0.5 Vdc	0~0.5 Vdc	low	0~0.5 Vdc	PS-ON/OFF and BL-ON/OFF is off, output= only 12V

Note: CON101: ADJ voltage is 0V~5V DC signal 5V is minimum output, 0V is maximum output
(亮度调节电压范围为 0V~5V 直流调光, 且 5V 最暗, 0V 最亮)

4.6 DC Output Ripple & Noise (输出纹波与噪音)

Table 10 Ripple and Noise (输出纹波和噪音)

Output Voltage	Ripple & Noise (mV)	
负载类别	阻性负载	整机负载
+12V	≤240	≤400

Dimming-Resistance load (调光状态)

Output Voltage 输出电压	Ripple(Max) and Noise 动态负载 (mV)
+12V	≤1200

Note: 1. Measurements shall be made with an oscilloscope with 20MHz bandwidth.
示波器须设置在 20 兆赫兹带宽

2. Outputs shall be bypassed at the connector with a 0.1uF ceramic capacitor and a 10uF electrolytic capacitor to simulate system loading.
输出须并联 0.1uF 的陶瓷电容和 10uF 的电解电容来模拟负载

4.7 DC Output Overshoot During Turn-On & Turn-Off (输出超调)

Output Channel	Output (V)	Over shoot voltage (V) 超调电压
----------------	------------	-----------------------------

		Turn on 开机	Turn off 关机
+12V	+ 12V	<13.2V	<13.2V

Note: All of dc output current from Min. to Max. 测试时负载范围：最小到最大

4.8 Dynamic Response (动态响应)

Voltage Regulation 电压变化率	Slew Rate 斜率	Load Change 负载变化
+12V(10.8-13.2)	0.2A/us	Min. to 50% load and 50% to Max load 最小载至半载；半载至满载

Not:Dynamic response measurements shall be set with a load changing repetition rate of 50Hz to 200Hz. 动态测试的负载变化频率范围是 50 赫兹到 200 赫兹。

4.9 Output impulse current (输出冲击电流)

Output Voltage 输出电压	+12V
Impulse Max. Current (A) 最大冲击电流 (A)	≤10A

Not:The PSU should be able to power up and operate normally when output is matching system of capacitance load.

当电源输出匹配系统的容性负载时，电源应能正常开启并正常工作。

4.10 Protection(保护)

4.10.1 DC Output Over current Protection(输出过流保护)

Table 11 DC Output Over current Protection(输出过流保护)

Output Voltage	Over Current (A)	Specification
+12V	3.6A-8A	Hiccup or Shutdown

Note: The over current protection should be test at other of dc output at Rated load.

过电流保护应在其它 DC 输出工作在标称负载条件下测试。

4.10.2 Over voltage(过压测试)

Output Voltage 输出电压	Spec (V)	Specification
+12V	15.0V-25.0V	Hiccup or Shutdown

4.10.3 DC Output Short Circuit Protection (输出短路保护)

Table 12 DC Output Over Short Protection(输出短路保护)

Output Voltage	Specification
+12V	Hiccup or Shutdown

Note: Each DC output shall have short circuit protection. A short condition on

any of DC outputs shall cause no damage to the power supply. The unit shall recover function automatically or by next AC cycle as soon as the short condition is removed. The Short Circuit protection should be test at other of dc output at Rated load. 每路输出都有输出短路保护功能，且短路时不会对电源造成损害。一旦短路条件解除，电源将尽快自动或通过下一次重新开机恢复正常功能。另外输出短路保护应在其它 DC 输出工作在标称负载条件下测试

4.10.4 LED Short Circuit Protection (输出短路保护)

LED	Specification
OPEN	Shutdown
SHORT	Shutdown

4.10.5 LED Open Protection (LED 开路保护)

AC Input 输入电压 (Vac)	Frequency 频率 (Hz)	LED Max Vout LED 最大输出范围 (V)	
90V	47	110Vmin	150Vmax
264V	63	110Vmin	150Vmax

4.10.6 Fuse protection (保险丝保护)

The Fuse inside the power supply shall open when the AC input current is over the rated current of fuse. This Fuse protection will cause switching power supply to fail.

当 AC 输入电流超过保险丝的额定电流的时候，电源内部的保险丝将熔断，呈开路状态。保险丝保护启动后电源将不能启动。

4.10.7 Reset After Shutdown (保护功能复位)

Recycle the AC signal, the power supply will restart after the fault removed. 故障去除后，关掉 AC 信号再打开，电源即可恢复。

4.11 Efficiency(效率)

80% min. It will be measured at the maximum load and typical line (230VAC). 效率在最大负载和典型输入电压下测量（230V），效率 $\geq$ 80%。

4.12 Green mode function(环保模式)

Green mode function: input power should be under 0.5W (12V/16mA) at 220Vac. 环保模式：在220V交流输入下，输入功率不超过0.5W（12V/16mA）。

4.13 Turn on delay time(开机延迟时间)

The turn on delay form application of AC input power to the establishment of rated DC power voltage should not exceed 3 seconds during the range from 130Vac to 240Vac

with rate load.

开机延迟时间是指，在 130Vac-240Vac 范围交流输入与标称负载情况下，从有交流输入到有额定直流电压输出的时间间隔，并且此时间间隔不能超过 3 秒。

4.14 Hold-up time(关机保持时间)

The power supply shall maintain voltage regulation within the specified limits in table 8 for at least 10 milliseconds (one cycle drop) after losing of input voltage under the following conditions:

关机时间是指，在如下的条件下关断输入电压，电源输出电压在满足表格 8 所示的规格的情况下持续的时间，且这段时间最少保持 10 毫秒。

Input voltage (输入电压) : 220Vac

Loading (负载) : Rate load (标称输出负载)

4.15 Mean time between failures (MTBF) (平均无故障时间)

50,000hrs at 25 degrees centigrade when calculated using MIL-HDBK-217F. The vendor can use agreed upon F. I. T. (failure - in - time) number in place of MTBF. 在 25 摄氏度条件下，使用 MIL-HDBK-217F 估计电源的平均无故障时间大约为 50,000 小时。也可以使用商用 F. I. T. 来计算平均无故障时间。

4.16 Hi-pot Test(耐压测试)

100% Hi-pot tested, Primary to second: 3KVAC or 4242VDC 1 minute.

初级到次级，100%耐高压测试，条件是 3000V 交流或 4242V 直流输入，持续时间 1 分钟。

5. Environmental requirement (工作环境)

5.1 Temperature (环境温度)

Operating	:	0°C to +40°C (non-condensing)
Store	:	-20°C to +70°C

5.2 Humidity (环境湿度)

Operating	:	10% to 90% (non-condensing)
Store	:	5% to 95%

5.3 Altitude (海拔高度)

Operating	:	10,000 ft. (max)
Store	:	20,000ft. (max)

6. International Standards (国际性认证)

6.1 EMC (电磁兼容性)

6.1.1 EMI standards (EMI 标准)

The power supply shall compliance with the following radio disturbance Criterion
该电源应符合下列无线电干扰标准。

- ☐ Sound and television broadcast receivers and associated equipment
声音和电视广播接收机及有关设备

EN55013	:	Sound and television broadcast receivers and associated equipment radio disturbance characteristics limits and methods of measurement
GB13837	:	声音和电视广播接收机及有关设备无线电干扰特性限值和测试方法
FCC CFR 47 Part 15 subpart B:美国联邦通信法规第47卷15章内无意式的辐射器材的相关规定		

6.1.2 EMS standards (EMS 标准)

The power supply shall compliance with the following immunity Criterion
该电源应符合下列抗扰度标准

- ☐ Sound and television broadcast receivers and associated equipment
声音和电视广播接收机及有关设备

EN55020	:	Sound and television broadcast receivers and associated equipment immunity characteristics limits and methods of measurement
GB/T 9383	:	声音和电视广播接收机及有关设备抗扰度限值和测试方法
EN61000-4-2	:	Electrostatic discharge immunity test
GB/T17626.2	:	静电放电抗扰度试验
EN61000-4-3	:	Radiated, radio-frequency, electromagnetic field immunity test
GB/T17626.3	:	射频电磁场抗扰度试验
EN61000-4-4	:	Electrical fast transient/burst immunity test
GB/T17626.4	:	电快速脉冲群抗扰度试验
EN61000-4-5	:	Surge immunity test
GB/T17626.5	:	浪涌（冲击）抗扰度试验
GB/T17626.3	:	射频电磁场抗扰度试验
EN61000-4-4	:	Electrical fast transient/burst immunity test

CON:±4KV; AIR:±8KV;
10 charge/point for Con;
10 charge/point for Air

900 MHz, 3 V/m,
duty cycle 1/8,
217 Hz repetition
frequency

AC port:±1KV

AC port:
差模±2KV
共模±4KV

AC port:±1KV

GB/T17626.4	:	电快速脉冲群抗扰度试验	
-------------	---	-------------	--

6.2 Safety (安全)

The power supply shall compliance with the following safety Criterion
电源应符合以下安全标准

- ☐ Sound and television broadcast receivers and associated equipment
声音和电视广播接收机及有关设备

EN60065	Audio , video and similar electronic apparatus - Safety requirements
IEC60065	Audio , video and similar electronic apparatus - Safety requirements
GB 8898	音频、视频及类似电子设备安全要求
UL60065	UL Standard for Safety for Audio, Video and Similar Electronic Apparatus - Safety Requirements

7. Notice (注意事项)

7.1 For safety issue, please keep 4.0mm at least from the metal parts of the system. Or put a high-voltage insulator between the power and the metal parts to avoid the situation of Hi-POT failure or arcing---etc.

出于安全问题的考虑,请在组装时确保板和系统金属材料间保持至少 4mm 以上的距离,或者使用具有足够绝缘等级的绝缘材料加以隔离,以避免产生高压放电

7.2 Don' t twist, deform, drop or knock the power supply during assembly
组装时,请确保无扭曲,弯折,掉落及碰撞等现象的发生

7.3 The power supply is usually designed without the case. Please take care about ESD at anytime

因为本产品为无外壳之设计,故在任何时候均应注意静电防护

7.4 When assembling, in order to avoid interference, please separate AC cable, DC output cable and LED cable from each other, and keep some distance.

组装时,为避免干扰,请把 AC 输入线、DC 输出线与 LED 输出线三线分开并保持一定的距离排放。